


ACROLINK®


7N Cu POWER CABLE
Stressfree® 99.99999% Purity Copper

7N-PC4020 Leggenda

7N-PC4020 Leggenda UL version

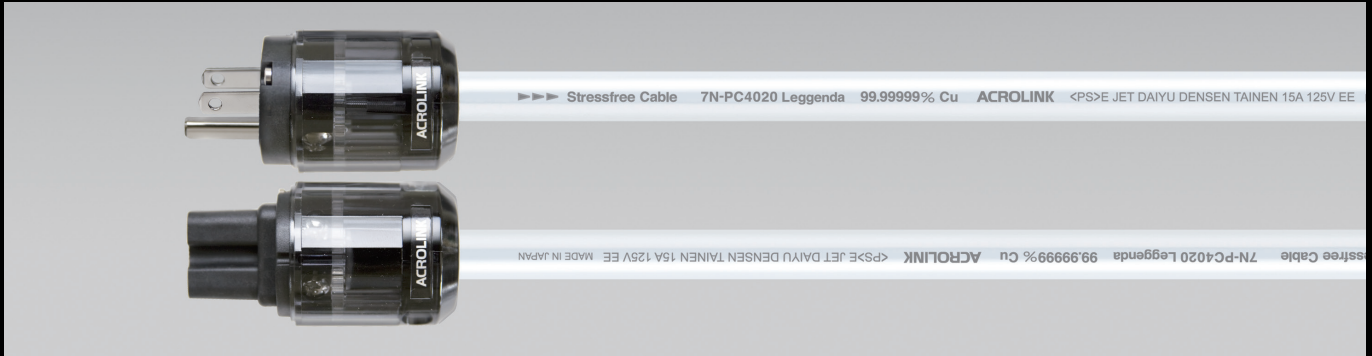


7N-PC4020 Leggenda Schuko version

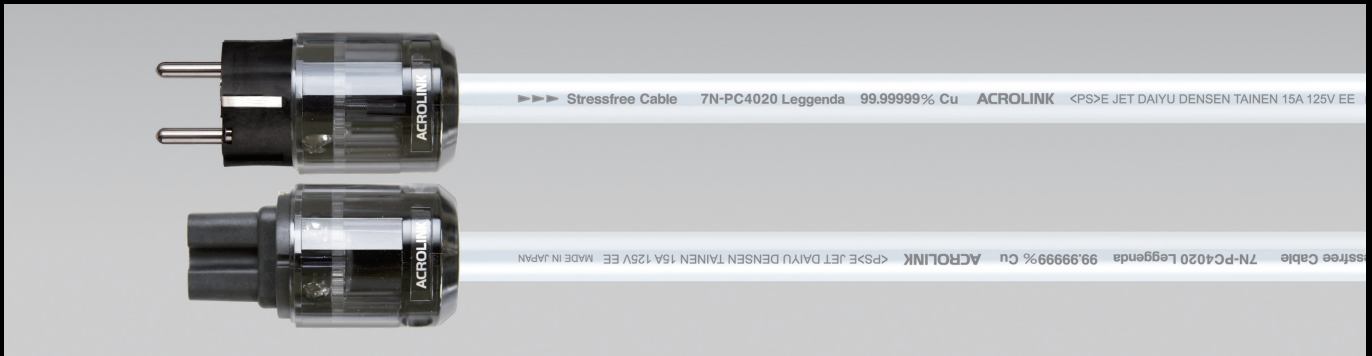

●7N-PC4020 Leggenda Standard length is 1.5m. Special length order is available.

7N-PC4020 Leggenda CB

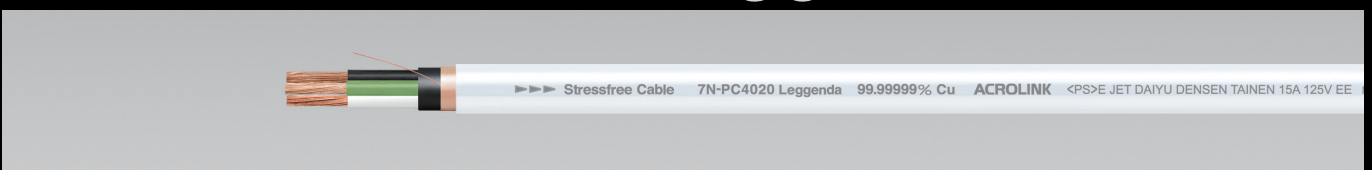

●7N-PC4020 Leggenda CB Packaging : 30m on spool


Cable materials & Specifications

Conductor	: 7N Cu D.U.C.C Stressfree×2 (0.37×18 strands)
	: 4N Cu for ground (0.37×18 strands)
Insulation material	: High molecular Polyolefin Resin (Black & White & Green)
1st Inner sleeve	: High molecular Polyolefin + tungsten + amorphous + carbon powder
2nd Inner sleeve	: Polyolefin with Resonance control powder
Shielding	: Copper foil with drain wire
Outer sleeve	: Lead free Polyvinyl Chloride
Conductor resistance	: 7.0mΩ/m
Cable diameter	: 12.6mm

Power plug & IEC connector

Contact parts	: Beryllium copper
Plating	: Silver layered rhodium (polished before plating)
Body	: Poly Butylene Terephthalate with glass fiber
Outer case	: Polycarbonate

7N-PC4020 Leggenda Cable structure

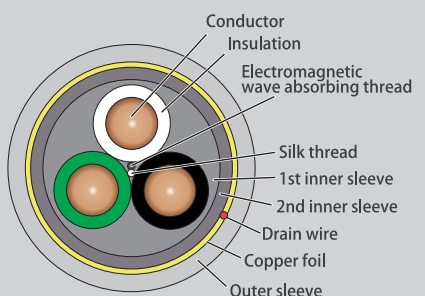

● The standard, the specification, and the price of the product might change without a previous notice.

● "ACROLINK®" and "Stressfree®" are registered trademarks of Acro Japan Co., Ltd. ● "D.U.C.C.®" is a registered trademark of Mitsubishi Materials Corporation.