


ACROLINK®


7N Cu POWER CABLE
Stressfree® 99.99999% Purity Copper

7N-PC4030 Purosangue

UL version

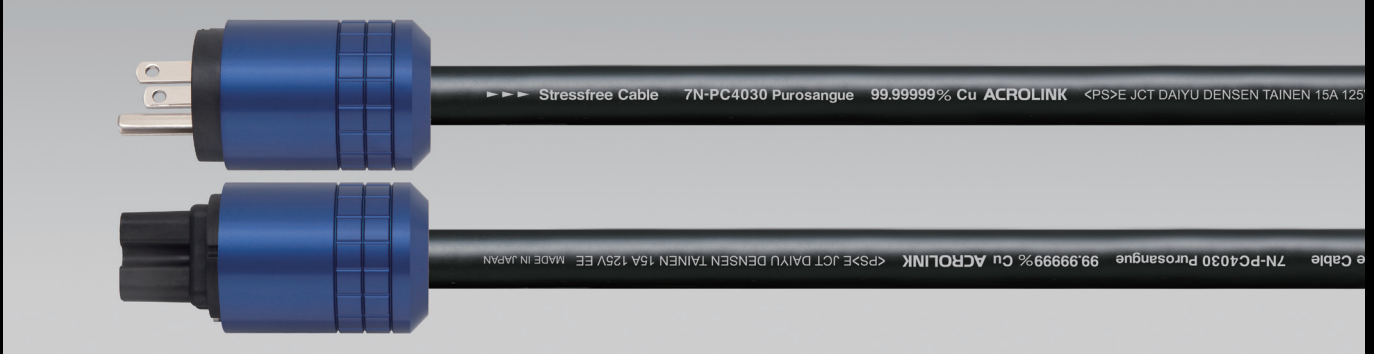

Schuko version

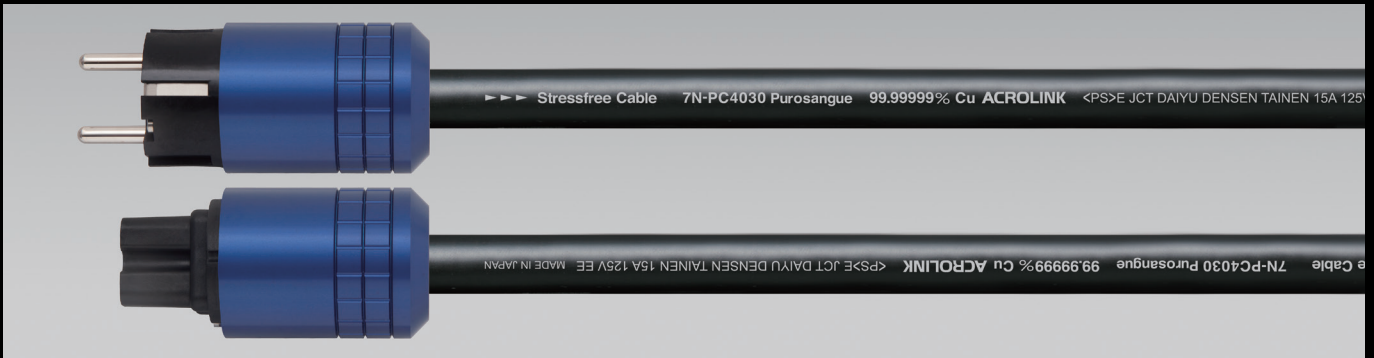

●Standard length is 1.5m. Special length order is available.

7N-PC4030 Purosangue CB




●Sold in 30m on spool

Cable materials & Specifications

Conductor	: 7N Cu D.U.C.C Stressfree (0.37mm×50 strands, 5.4 Sq. AWG10)×2
	: 4N Cu for ground (0.37mm×50 strands)
Insulation	: High molecular Polyolefin Resin
Inclusion	: 100% Silk
Shielding	: Copper foil tape with drain wire
Inner sleeve	: Polyolefin resin with Tungsten and Amorphous powder
Outer sleeve	: High molecular Polyolefin Resin
Conductor resistance	: 2.7mΩ/m
Cable diameter	: 14.7mm

AC Plug & IEC Connector

Blade	: Beryllium copper (Buff Polished)
Plating	: Silver layered Rhodium
Body	: Polybutylene Terephthalate with 30% Glass filled
Inter case	: Polyacetal Resin (CNC machined from solid block of material)
Outer case	: Duralumin A2017 (CNC machined from solid block of material)

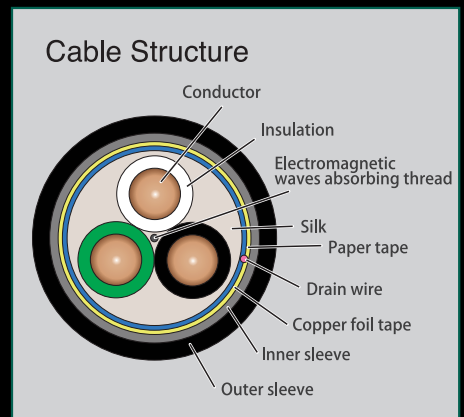

※D.U.C.C stands for Dia Ultra Crystallized Copper which is specifically developed copper wire for high-end audio cables. D.U.C.C has controlled crystal structure and the minimized transmission loss. Patent technology and registered trade mark of Mitsubishi Materials LTD.

●“ACROLINK®” and “Stressfree®” are registered trademarks of Acro Japan Co., Ltd. ●“D.U.C.C.®” is a registered trademark of Mitsubishi Materials Corporation