

ACROLINK®

7N Cu Speaker Cable
Stressfree® 99.99999% Purity Copper

7N-S1010 Purosangue



Cable material & Specifications


| | |
|----------------|---|
| Outer diameter | : 10.6mm |
| Conductor | : 7N Cu D.U.C.C Stressfree (0.37mm×18 strands, 1.9 Sq. AWG14)×2 |
| Insulation | : High molecular Polyolefin Resin |
| Inclusion | : 100% Silk |
| Shielding | : Copper foil tape |
| Inner sleeve | : Polyolefin resin with Tungsten and Amorphous powder |
| Outer sleeve | : High molecular Polyolefin Resin |

Conductor resistance : 7.4mΩ/m

Electrostatic capacitance : 77pF/m

●Sold in 30m on spool.

Cable Structure

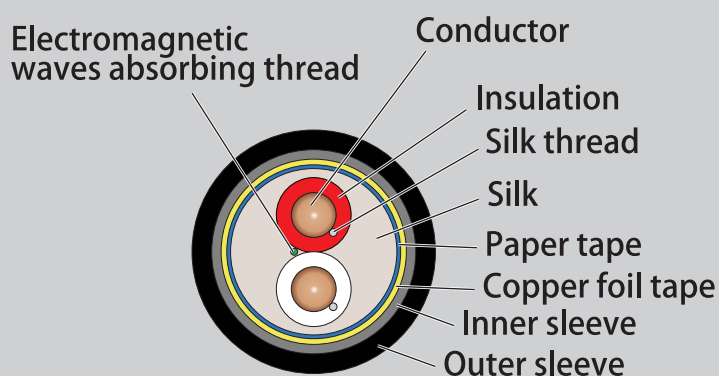

※D.U.C.C stands for Dia Ultra Crystallized Copper which is specifically developed copper wire for high-end audio cables. D.U.C.C has controlled crystal structure and the minimized transmission loss. Patent technology and registered trade mark of Mitsubishi Materials LTD.

- “ACROLINK®” and “Stressfree®” are registered trademarks of Acro Japan Co., Ltd.
- “D.U.C.C.®” is a registered trademark of Mitsubishi Materials Corporation