

ACROLINK®

7N Cu SPEAKER CABLE
Stressfree® 99.99999% Purity Copper

7N-S1010 Leggenda




SPECIFICATIONS


Outer diameter	: 10.6mm
Signal Conductor	: 7N D.U.C.C Stressfree 0.37φ×18 Strands (2 cores)
Single Conductor size	: 1.93 Sq (AWG 14)
Insulation material	: High molecular Polyolefin Resin (Red & White)
Inner sleeve	: Polyolefin with Resonance control powder + Tungsten + Amorphous
Shielding	: Copper tape
Outer sleeve	: Lead free Polyvinyl Chloride
Conductor resistance	: 7.5mΩ/m
Electrostatic capacitance	: 78pF/m

●Packaging: 30m on spool

7N-S1010 Leggenda Cable structure 10.6mm

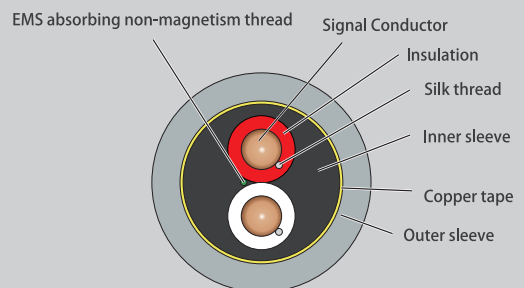

7N-S1040 Leggenda



SPECIFICATIONS

Outer diameter	: 13.2mm
Signal Conductor	: 7N D.U.C.C Stressfree 0.37φ×50 Strands (2 cores)
Single Conductor size	: 5.36 Sq (AWG 10)
Insulation material	: High molecular Polyolefin Resin (Red & White)
Inner sleeve	: Polyolefin with Resonance control powder + Tungsten + Amorphous
Shielding	: Copper tape
Outer sleeve	: Lead free Polyvinyl Chloride
Conductor resistance	: 2.8mΩ/m
Electrostatic capacitance	: 76pF/m

●Packaging: 30m on spool

7N-S1040 Leggenda Cable structure 13.2mm

